


Operation Manual

(Galaxy Mug Pro GS-202/203)


1.Pre-printing Temperature Setting

Press “set” button first time, “temperature 1” flash, press “up” and “down” button to set, range from 0~160 C,0~320F. Display as below.

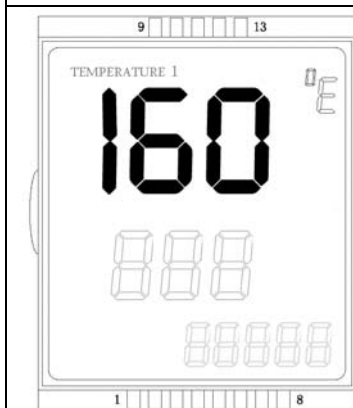


2.Printing Temperature Setting

Press “set” button second time, “temperature 2” flash, press “up” and “down” button to set, range from 0~200C,0~392F. Display as below

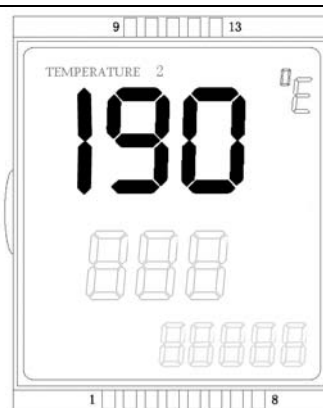


3.Time Setting

Press “set” button third time, “time” flash, press “up” and “down” button to set, range from 0~999S, Display as below

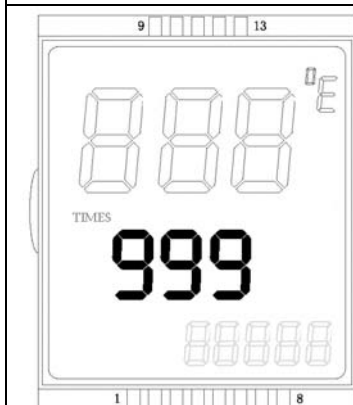

4. Counter Setting

Press “down” button for 4 seconds, “counter” flash, press “up” and “down” button to set, range from 0~99999, press “up” and “down” together to make zero clearing. Display as below.

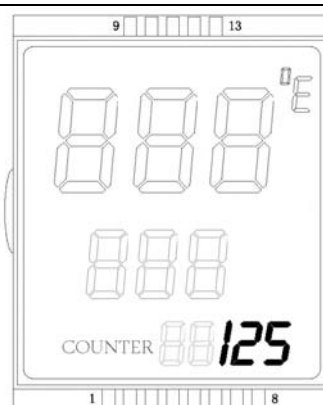

5. Switch Between F and C

Press and hold “up” button then press “set” button, display as below. Press “up” and “down” button to choose F or C. Press “set” button again to complete setting.



6. Temperature Calibration

Press and hold “down” button then press “set” button, display as below. Press “up” and “down” button to make temperature calibration. Press “set” button again to complete setting.



7. Restore Factory Setting

Press “up” button and “down” button together for 5 seconds, all lights flash three times then restore factory setting. Temperature=100,Time=8.

8. Circuit Diagram

